


# PLL 28.1000.30.1/DALI

PL 28 (1xLED 209W 830/3000K 24790lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

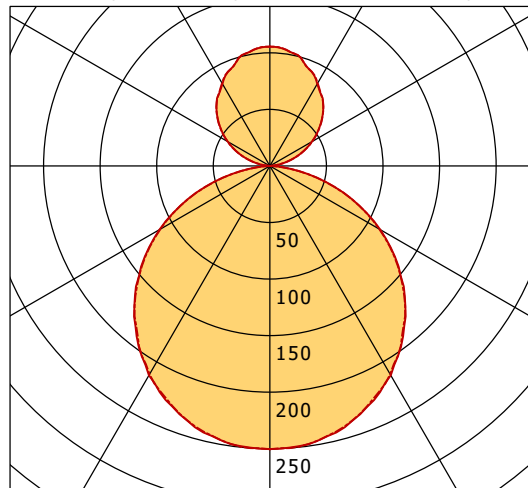

	C0	C90	C180	C270
0°	250	250	250	250
30°	214	213	214	213
60°	113	112	113	112
90°	0	0	0	0
120°	43	43	43	43
150°	84	85	84	85
180°	105	105	105	105
cd / 1000 lm				

LDC unsuitable for cone representation.  
The C0 angle is oversized.

<b>η</b> Efficiency	LED 119 lm/W
Direct/Indirect	↓ 72% / ↑ 28%
System Power	209 W
<b>UGR</b> Reflection factors	X=4H, Y=8H 70/50/20
UGR C0/C180	21.2
UGR C90/C270	21.2
CIE Flux Codes	47 79 96 72 100
Ra/CRI	> 80