


APP 10.5030.1.2/DALI

Appareo Linear (1xLED 41W 830/3000K 5100lm)

— C0/C180 cd / 1000 lm - - - C90/C270

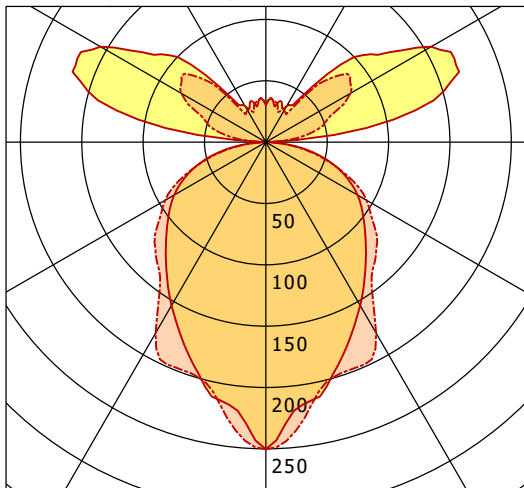

	C0	C90	C180	C270
0°	250	250	250	250
30°	154	180	154	180
60°	86	95	86	95
90°	3	2	3	2
120°	156	79	156	79
150°	34	30	34	30
180°	31	31	31	31
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	124 lm/W
Direct/Indirect	↓ 58% / ↑ 42%
System Power	41 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	16.5
UGR C90/C270	16.4
CIE Flux Codes	46 76 94 58 100
Ra/CRI	> 80