



# VTRXS 13.0530.35/DALI

Vale-Tu Round XSmall (1xLED 12W 830/3000K 1160lm Wide-Flood °)

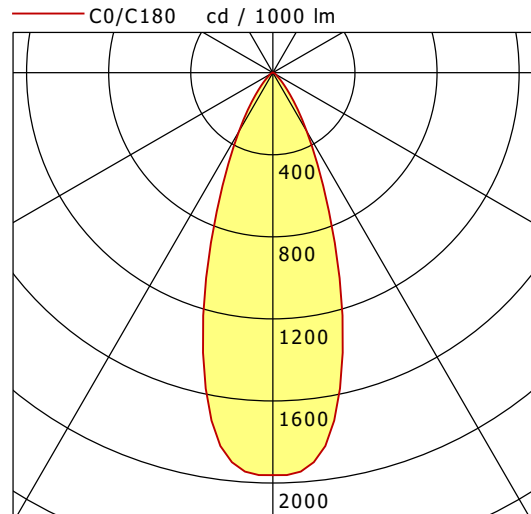

	C0	C90	C180	C270
0°	1962	1962	1962	1962
15°	1320	1320	1320	1320
30°	330	330	330	330
45°	59	59	59	59
60°	15	15	15	15
75°	5	5	5	5
90°	0	0	0	0
cd / 1000 lm				

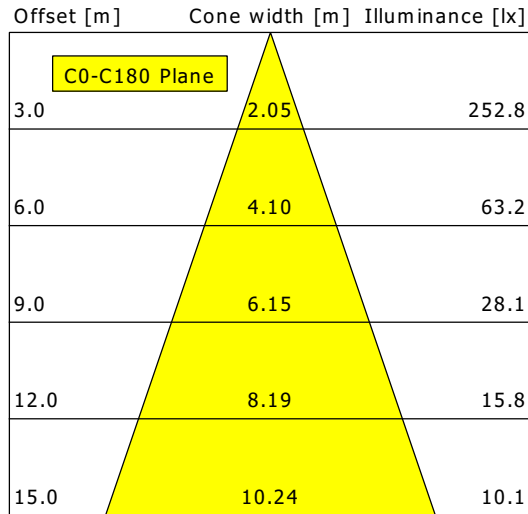

<b>η</b>	LED
Efficiency	97 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	12 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.5
UGR C90/C270	22.5
CIE Flux Codes	93 98 100 100 100
Ra/CRI	>80