


Art. no. 843519

Floodlights RF-smart, Flood, 230V, 50W, RGB+CCT,
IP65

 **DEKO LIGHT**

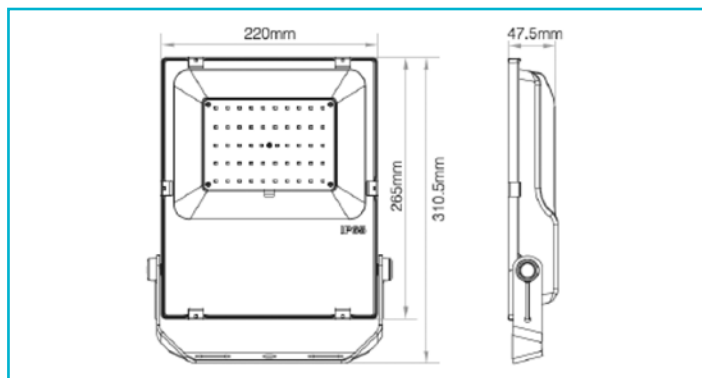

Housing Material Die-cast aluminium, Plastic
Housing Color Anthracite

Protection Class Protection class I/protective grounding

Rated Input 50 W

Rated Input Voltage Frequency 100-240 V/AC 50 / 60 Hz

Power Supply Unit incl. Yes

Connection Type Power plug IP44

Primary Cable Length 1.5 m

Number of Cable Entries 1

Dimmable Yes

Control technology RF-Smart, ZigBee 3.0

Motion Detector No

Life Time L70 / B50 50000 h

Switching Cycles 100000

Power Consumption 50 kWh/1000h

Energy Efficiency Class F

Light Source LED, Light source not changeable

Colour Temperature 2700-6500 K

Colour Rendering Index (Ra) 80

Rated Luminous Flux 4800 lm

Rated Angle of Reflection 160 Degree

Swivel Angle 345 Degree

Light Exit Surfaces 1

Light characteristics Direct

Light direction Front

Length 220 mm

Width 48 mm

Height 311 mm

Working Temperature -20 to 45 °C

Storage Temperature -30 to 70 °C

IP Protection Class Lamp IP 65

IP Protection Class Plug IP 44