


# PLL 22.675.40.1/DALI

PL 22 (1xLED 75W 840/4000K 8030lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

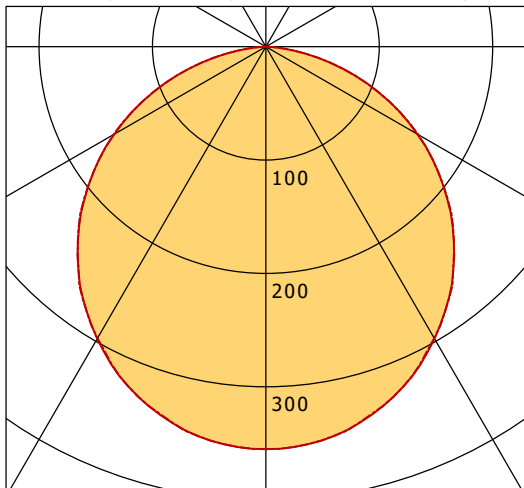

	C0	C90	C180	C270
0°	355	355	355	355
15°	340	339	340	339
30°	298	297	298	297
45°	234	234	234	234
60°	154	155	154	155
75°	65	65	65	65
90°	0	0	0	0
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	8.88   8.86	316.7
6.0	17.76   17.72	79.2
9.0	26.64   26.59	35.2
12.0	35.53   35.45	19.8
15.0	44.41   44.31	12.7

<b>η</b>	LED
Efficiency	107 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	75 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.3
UGR C90/C270	23.3
CIE Flux Codes	47 79 96 100 100
Ra/CRI	>80