
## lightnet

## Matric-RX

Pendant light-line - Direct/indirect light distribution

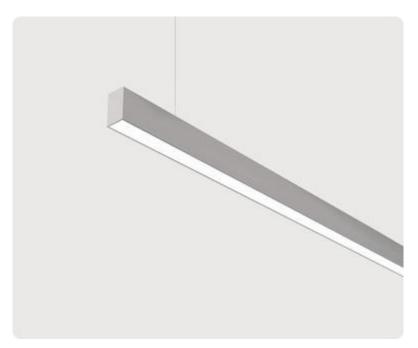

Illustrations may only be similar and serve as an orientation.

Matric-RX. LED. Pendant light-line. Luminaire body made of high-quality aluminum profile. Surface finish Silver Anodised. Direct/indirect light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Wall-Washer for asymmetrical light distribution. Switchable. LxWxH (rectangular). L=2055mm. W=40mm. H=75mm. Single-cord suspension (Set). Pendant length max 1500mm. Power supply: transparent. Ceiling rose:

Matching luminaire's surface colour. Medium-power current. 6695lm. 65W. 6kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

Article code: LRXGEE-830M-L2055-A


## lightnet


## Matric-RX

Pendant light-line - Direct/indirect light distribution

Article code: LRXGEE-830M-L2055-A







Customer / P	roject:		
Note:			
note:			

Productname Matric-RX Lamp LED

Installation Type Pendant light-line Surface finish Silver Anodised

Light characteristics Direct/indirect light distribution

Colour temperature 3000K Colour Rendering Index (CRI) CRI>80 Optical system Wall-Washer Control Switchable Length L/Diameter D (mm) L=2055mm Width W (mm) W=40mm Height H (mm) H=75mm Current/Power Medium-Power Luminous Flux 6695lm Power consumption 65W

Suspension Single susp. (Set)

Ceiling rose colour Ceiling rose: Matching luminaire`s

surface colour

Pendant length (mm) Pendant length max 1500mm

Degree of protection IP20

Certification Prüfzeichen: ENEC

Cable Colour Power supply: transparent LED lifetime L85B10 (tq 25°C) = 50.000h

Photometric code 8 30 / 3 3 9 Photobiological class RG0 (EN62471)

Indoor/Outdoor Indoor: ta [ambient] max. 25°C

Weight (kg) 6kg

