
lightnet

Matric-RX

Pendant light-line - Direct/indirect light distribution

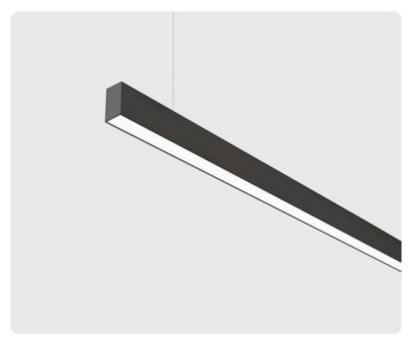

Illustrations may only be similar and serve as an orientation.

Matric-RX. LED. Pendant light-line. Luminaire body made of high-quality aluminum profile. Surface finish Jet Black. Direct/indirect light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and uniform illumination. Dimmable DALI. LxWxH (rectangular). L= 890mm. W=40mm. H=75mm. Single-cord suspension (Set). Pendant length max 1500mm. Power supply:

transparent. Ceiling rose: Matching luminaire`s surface colour. High-power current. 4020lm. 33W. 2,9kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

Article code: LRXOBL-840H-L890-A


lightnet


Matric-RX

Pendant light-line - Direct/indirect light distribution

Article code: LRXOBL-840H-L890-A







| Customer / Project: | | | |
|---------------------|--|--|--|
| Note: | | | |
| | | | |

Productname Matric-RX Lamp LED

Installation Type Pendant light-line

Surface finish Jet Black

Light characteristics Direct/indirect light distribution

Colour temperature 4000K
Colour Rendering Index (CRI) CRI>80
Optical system Opal diffuser
Control Dimmable (DALI)
Length L/Diameter D (mm) L=890mm
Width W (mm) W=40mm

Width W (mm) W=40mm
Height H (mm) H=75mm
Current/Power High-Power
Luminous Flux 4020lm
Power consumption 33W

Suspension Single susp. (Set)

Ceiling rose colour Ceiling rose: Matching luminaire`s

surface colour

Pendant length (mm) Pendant length max 1500mm

Degree of protection IP20

Certification Prüfzeichen: ENEC

Cable Colour Power supply: transparent LED lifetime L80B10 (tq 25°C) = 50.000h

Photometric code 8 40 / 3 3 9 Photobiological class RG0 (EN62471)

Indoor/Outdoor Indoor: ta [ambient] max. 25°C

Weight (kg) 2,9kg

