



# BIXXL 204.40.60.2/DALI-EU

Bixxl 200 (1xLED 41W 840/4000K 4500lm 60 °)

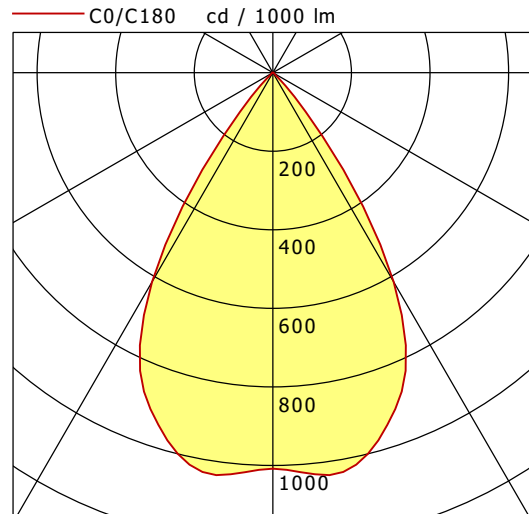

	C0	C90	C180	C270
0°	1008	1008	1008	1008
15°	988	988	988	988
30°	615	615	615	615
45°	33	33	33	33
60°	4	4	4	4
75°	3	3	3	3
90°	0	0	0	0
cd / 1000 lm				

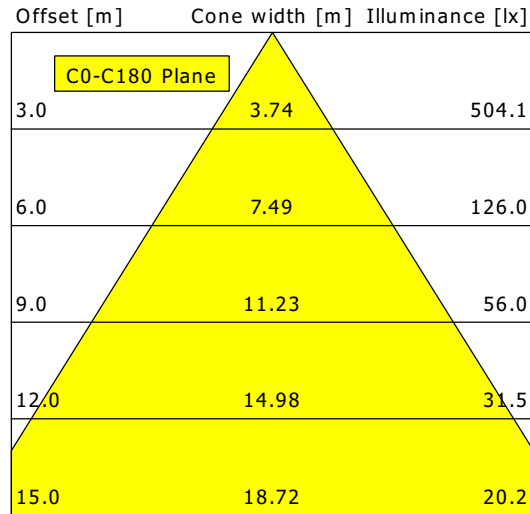

<b>η</b>	LED
Efficiency	110 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	41 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.0
UGR C90/C270	22.0
CIE Flux Codes	97 99 100 100 100
Ra/CRI	> 80