

lightnet

Basic-P5

Pendant luminaire - Direct/indirect light distribution

Article code: BP5OBL-830H-D800-U



Illustrations may only be similar and serve as an orientation.

Basic-P5. LED. Pendant luminaire. Luminaire body with 38mm visible overall height and minimalist edge of only 5mm. Luminaire body made of high-quality aluminum profile. Surface finish Jet Black. Direct/indirect light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Dimmable DALI. DxH (round). D=800mm. H=38mm. Central cord suspension with ceiling rose and power supply cable (Set). Pendant length max 1500mm.



Power supply: transparent. Ceiling rose: Matching luminaire's surface colour. High-power current. 9911lm. 81W. 9,5kg. Binning initial <= MacAdam 3. IP40. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

lightnet

Basic-P5

Pendant luminaire - Direct/indirect light distribution

Article code: BP5OBL-830H-D800-U

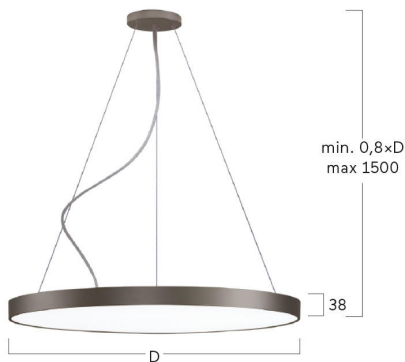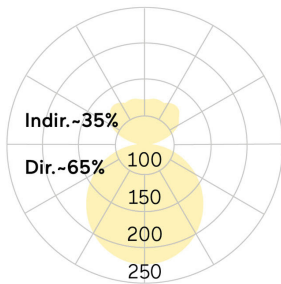

Customer / Project: _____

Note: _____

| | |
|------------------------------|---|
| Productname | Basic-P5 |
| Lamp | LED |
| Installation Type | Pendant luminaire |
| Surface finish | Jet Black |
| Light characteristics | Direct/indirect light distribution |
| Colour temperature | 3000K |
| Colour Rendering Index (CRI) | CRI>80 |
| Optical system | Opal diffuser |
| Control | Dimmable (DALI) |
| Length L/Diameter D (mm) | D=800mm |
| Height H (mm) | H=38mm |
| Current/Power | High-Power |
| Luminous Flux | 9911lm |
| Power consumption | 81W |
| Suspension | Central susp. (Set) |
| Ceiling rose colour | Ceiling rose: Matching luminaire`s surface colour |
| Pendant length (mm) | Pendant length max 1500mm |
| Degree of protection | IP40 |
| Certification | Prüfzeichen: ENEC |
| Cable Colour | Power supply: transparent |
| LED lifetime | L80B10 (tq 25°C) = 50.000h |
| Photometric code | 8 30 / 3 3 9 |
| Photobiological class | RG0 (EN62471) |
| Indoor/Outdoor | Indoor: ta [ambient] max. 25°C |
| Weight (kg) | 9,5kg |

