


LED dimmer 24 V DC, DALI-, 1-10 V-, PUSH-dimmable  
Article no. 17502000

Light.  
For Generations.

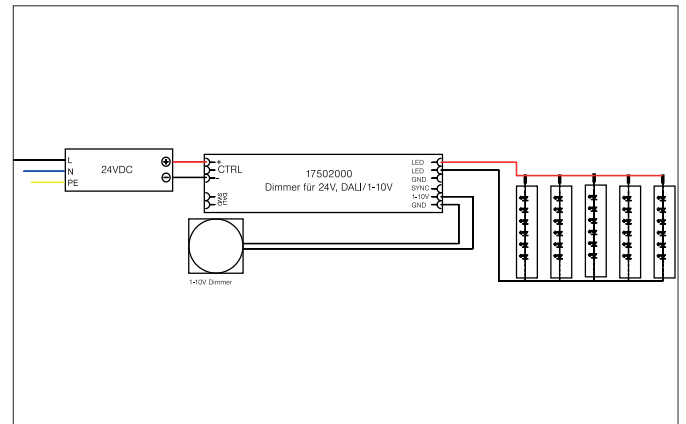

#### Tender

LED dimmer 24 V DC, DALI-, 1-10 V-, PUSH-dimmable. Single-channel (one-color) LED dimmer for constant voltage operation (24 V DC). Wiring is carried out using plug terminals. Cable cross section: 0.5 - 2.5 mm<sup>2</sup>. An external power supply is required for operation. Output signal (dimming): PWM (pulse width modulation). With protection against overload, short-circuit, overtemperature and idle run, maximum output current: 5 A. The device can be controlled using DALI or a push-button (Push-dim) or 1-10 V. In order to increase the power, multiple devices can be operated as master / slave. Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: 24V DC, Power: 120W, Control: DALI.

Article data	
Article no.	17502000
GTIN	4250047782070
Short description	LED dimmer 24 V DC, DALI-, 1-10 V-, PUSH-dimmable
Material	Plastic
Length	183 mm
Width	33 mm
Hight	23 mm
Weight	0.081 kg

LED dimmer 24 V DC, DALI-, 1-10 V-, PUSH-dimmable  
Article no. 17502000

Light.  
For Generations.

Operating technology of driver	
Protection class	II
Degree of protection	IP20
Power min	0 W
Power	120 W
Control	DALI, 1-10 V, PUSH-Dimm
Environment temperature (ta)	0°C up to 40°C
Measure point (tc)	max. +55 °C

Packing data	
Gross weight	0.105 kg
Length of packaging	45 mm
Packaging width	35 mm
Packaging height	190 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.