


FYR 104.0600.840/DALI


Fyrre (1xLED 37W 840/4000K 4480lm)

— C0/C180 cd / 1000 lm - - - C90/C270

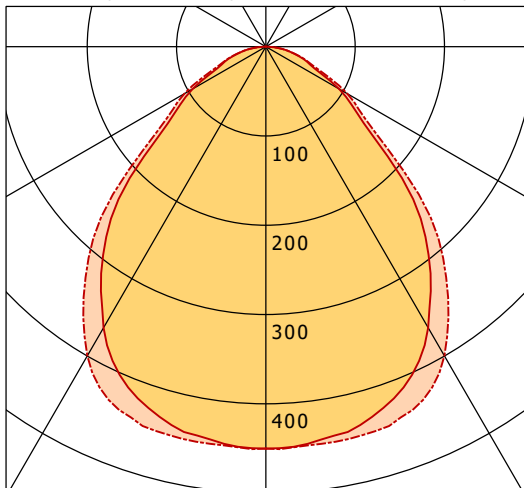

	C0	C90	C180	C270
0°	450	450	450	450
15°	434	448	434	448
30°	363	400	363	400
45°	225	252	225	252
60°	95	105	95	105
75°	35	37	35	37
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

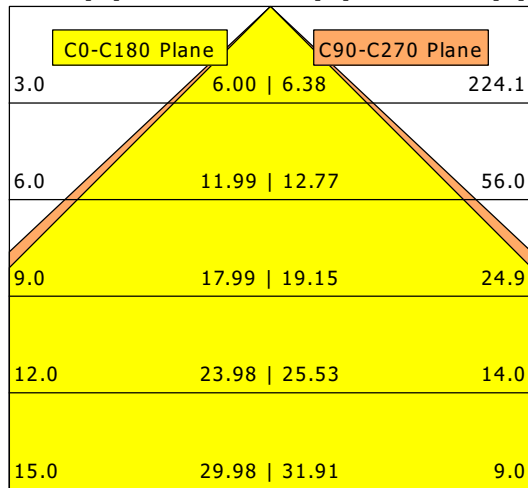

η	LED
Efficiency	121 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	37 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.7
UGR C90/C270	19.0
CIE Flux Codes	60 87 97 100 100
Ra/CRI	>80