


**Special features**

- Can be dimmed using leading-edge/trailing-edge phase dimmers
- Flicker-free
- Short-circuit-proof, overload protection, overheating protection

Housing Material	Plastic
Housing Color	Black
Operating Mode	Constant current
Protection Class	Protection class II/protective insulation
Power	23.0-45 W
Output Voltage	22-43 V/DC
Output Current	1050 mA
Dimmable	Yes
Control	Trailing-edge dimmer
Number of Channels	1
Power Factor	0.98
Connection Type	Clamp
Number of Circuit Breaker B10A max.	35
Number of Circuit Breaker B16A max.	56
Number of Circuit Breaker C10A max.	35
Number of Circuit Breaker C16A max.	56
Inrush Current max.	5 A / 100 µs
Capacitive Load	33.46 nF
Reference Point Tc	85 °C
Working Temperature	-20 to 45 °C
Storage Temperature	-20 to 70 °C
IP Protection Class	IP 20
Life Time	50000 h
Length	166 mm
Width	52 mm
Height	25 mm
Product weight	185 g

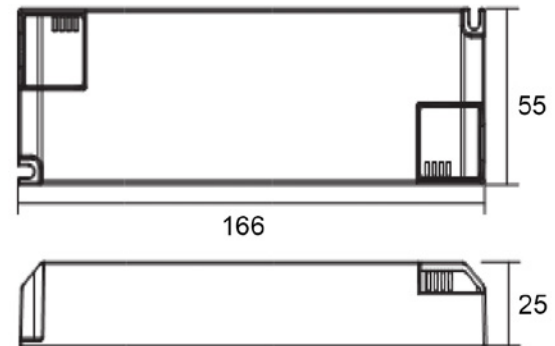