


LUZ-D22 103.830.AS/DALI

LUZ | Pendant (1xLED 22W 830/3000K 3240lm)

— C0/C180 cd / 1000 lm - - - C90/C270

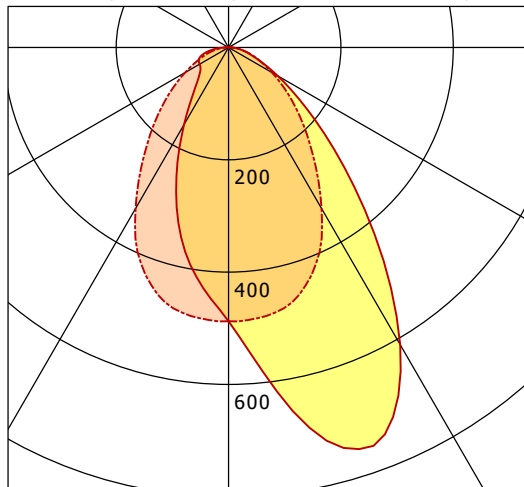

| | C0 | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0° | 488 | 488 | 488 | 488 |
| 15° | 733 | 463 | 337 | 463 |
| 30° | 611 | 331 | 159 | 331 |
| 45° | 279 | 184 | 75 | 184 |
| 60° | 101 | 89 | 59 | 89 |
| 75° | 33 | 36 | 47 | 36 |
| 90° | 7 | 2 | 8 | 2 |
| cd / 1000 lm | | | | |

LDC unsuitable for cone representation.
Asymmetric LDC.

| | |
|----------------------------------|------------------------|
| η Efficiency | LED 147 lm/W |
| Direct/Indirect | ↓ 99% / ↑ 1% |
| System Power | 22 W |
| UGR Reflection factors | X=4H, Y=8H 70/50/20 |
| UGR C0/C180 | 23.1 |
| UGR C90/C270 | 22.5 |
| CIE Flux Codes | 64 88 97 99 100 |
| Ra/CRI | > 80 |