



FLIR 300.2040.01

Flix 300 Round (FLIRZ 300.05, 1xLED 21W 840/4000K 2230lm 75 °)

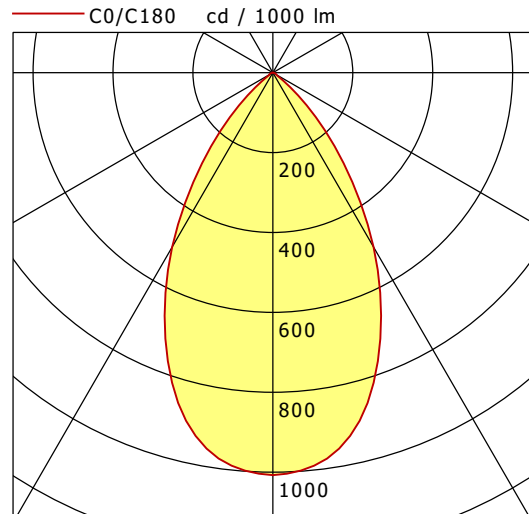

	C0	C90	C180	C270
0°	1007	1007	1007	1007
15°	880	880	880	880
30°	504	504	504	504
45°	136	136	136	136
60°	11	11	11	11
75°	5	5	5	5
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

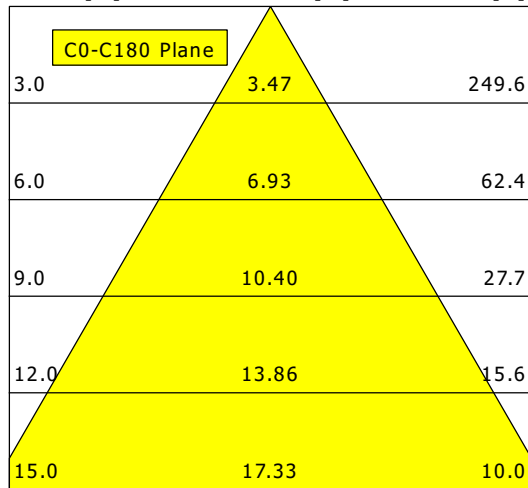

η	LED
Efficiency	106 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	21 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.9
UGR C90/C270	18.9
CIE Flux Codes	88 98 100 100 100
Ra/CRI	>80