


Solvla | Free-Standing (1xLED 79W 830/3000K 10385lm)

— C0/C180 cd / 1000 lm - - - C90/C270

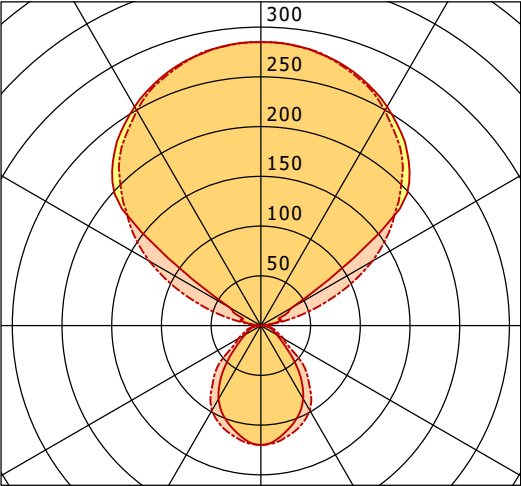

	C0	C90	C180	C270
0°	120	120	120	120
30°	85	99	85	99
60°	19	26	19	26
90°	1	1	1	1
120°	36	130	36	130
150°	254	249	254	249
180°	285	285	285	285
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η		LED
Efficiency		131 lm/W
Direct/Indirect		↓ 24% / ↑ 76%
System Power		79 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		17.1
UGR C90/C270		18.6
CIE Flux Codes		60 86 97 24 100
Ra/CRI		> 80