
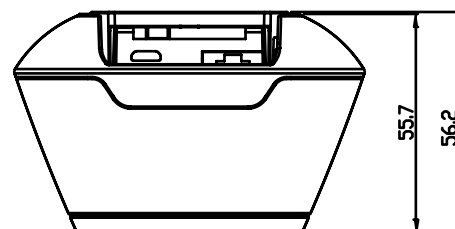
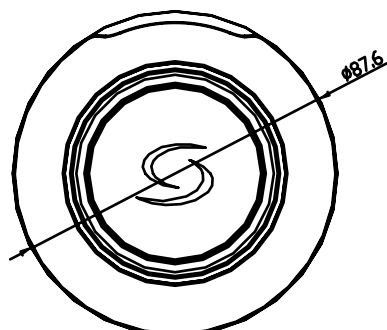


Produktdatenblatt Technical Datasheet

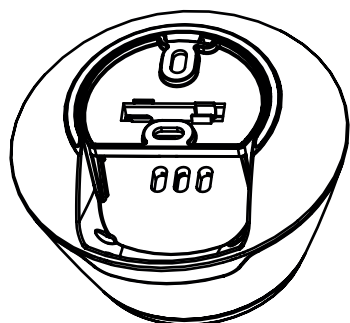

Universelles Gateway

Das UGE600 ermöglicht es Ihnen Ihr Smart Home System mittels Tablet oder Smartphone zu steuern. Muss mit einem internetfähigen Router verbunden werden. .

Universal Gateway

The SALUS universal gateway is what connects your SALUS Connect devices together and when connected to any WIFI router allows control via Smartphone or PC, using the SALUS Connect app.

Technische Information :

Produktname	Universelles Gateway
Benutzerinterface	Ein Multifunktions-Knopf Zweifarbige LED - ROT - GRÜN
Anschluss	1 x 10/100 LAN Port RJ45
Spannungsversorgung	5V DC über USB (1m Micro USB auf Type A Kabel)
Material	PC241R
Montage	Tisch oder Wand Montage
Farbe	Weiß
Schutzart	IP30
Zertifizierung	Rohs-2, REACH, WEEE
Frequenz	2,4Ghz Zigbee
Umgebungstemp.	0-50 °C
Lagertemp.	-10-60 °C
Max. Luftfeuchtigkeit	5-90% RH
Zertifizierung	CE; R&TTE

Technical information :

Product name	Universal Gateway
User Interface	One Multifunction button
Indication	Bi Colour LED - RED - GREEN
Port	1 x 10/100 LAN port
Power Supply	5V DC through USB (1m Detachable Micro USB to Type A cable) by power adaptor
Housing Material	PC241R
Mounting	Table or wall mounted
Colour	White
Finishing	Matte white fine finishin
IP Rating	IP30
Protection	Rohs-2, REACH, WEEE
Frequency	2,4Ghz Zigbee HA1.2
Operating Temperature	0-50 C
Storage Temperature	-10-60 C
Operating Humidity	5-90% RH
Approval I	CE; R&TTE

Design Ansicht / Design Views



Date/Version

05/16 - 1.0

Technical disclaimer

Alle Rechte vorbehalten. Technische Änderungen vorbehalten.
We reserve the right to alter our products without notice.
This also applies to products already on order provided
that such changes do not change the functionary
of the product

Contact

Salus Controls GmbH
Dieselstraße 34, Mühlheim am Main
D-63165, Germany
Tel: +49 (0) 6108 825850
info@salus-controls.de