


# ML-A 060.1130.14 OPDF/DALI


Monoline 060 | Surface-Mounted (1xLED 41W 830/3000K 4770lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

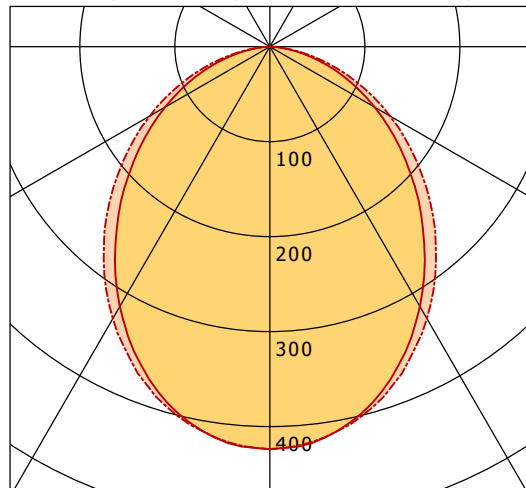

	C0	C90	C180	C270
0°	424	424	424	424
15°	394	398	394	398
30°	316	331	316	331
45°	219	241	219	241
60°	127	146	127	146
75°	49	58	49	58
90°	0	0	0	0
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

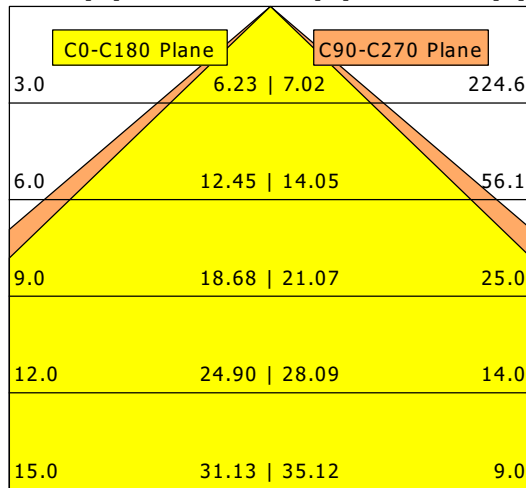

<b>η</b>	LED
Efficiency	116 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	41 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	25.7
UGR C90/C270	26.4
CIE Flux Codes	52 82 97 100 100
Ra/CRI	>80