


Art. no. 707228

Trunking system Sanotrunk Universal 120 degree, 75 W, On/Off, 4000 K, White

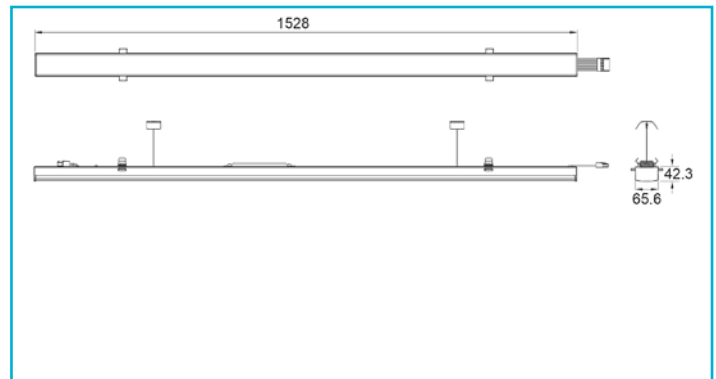

Housing Material	Aluminium	Working Temperature	-25 to 50 °C
Housing Color	White	Storage Temperature	-25 to 85 °C
Material of Lens	PMMA	IP Protection Class	IP 40
Halogen free	Yes	IK Protection Class	IK04
Functions	Leuchte kann mit Gleichstrom aus einer Zentralbatterie eines Notstromsystems betrieben werden., Phase switch	Life Time L70 / B50	130000 h
Protection Class	Protection class I/protective grounding	Life Time L80 / B10	72000 h
Power Selectable	75 W, 68 W, 59 W, 52 W, 42 W, 36 W, 27 W, 21 W	Life Time L80 / B50	85000 h
Rated Input Voltage	198-264 V/AC	Switching Cycles	50000
Dimmable	No	Power Consumption	75 kWh/1000h
Voltage range DC	168-275 V/DC		
Voltage range emergency lighting EOFI	186-250 V/DC 100 %		
Light Source	LED, Light source changeable TC		
Lightcolor	Neutral white		
Color Temperature	4000 K		
Colour Consistency	3 SDCM		
Colour Rendering Index (Ra)	80		
Rated Luminous Flux	11600 lm		
Luminous Efficiency	155 lm/W		
Rated Angle of Reflection	120 Degree		
UGR	31		
Light characteristics	Direct		
Light direction	Below		
Length	1528 mm		
Width	656 mm		
Height	410 mm		
Product weight	1850 g		