



# FLIR 300.3040.01

Flix 300 Round (FLIRZ 300.05, 1xLED 26W 840/4000K 2950lm 75 °)

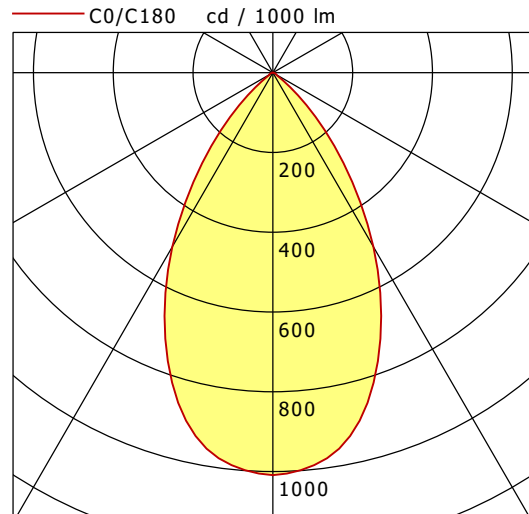

	C0	C90	C180	C270
0°	1009	1009	1009	1009
15°	881	881	881	881
30°	504	504	504	504
45°	135	135	135	135
60°	10	10	10	10
75°	5	5	5	5
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

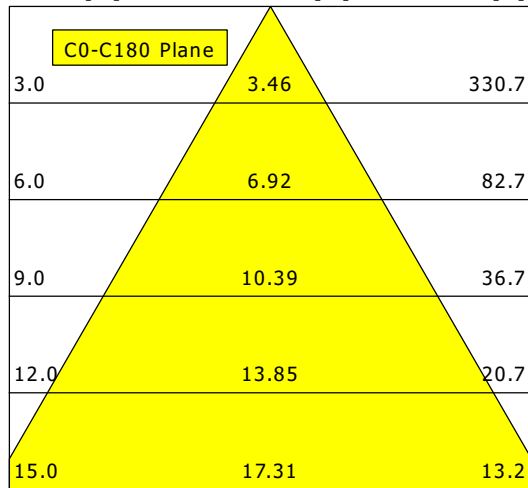

<b>η</b>	LED
Efficiency	114 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	26 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.9
UGR C90/C270	19.9
CIE Flux Codes	88 98 100 100 100
Ra/CRI	>80