

## N-type i-TOPCon Ultra

DUAL GLASS MONOCRYSTALLINE MODULE

TSM-NEG9RP.28Z 465-485W

**485<sub>W</sub>** / MAXIMUM POWER OUTPUT

**24.3%** / MAXIMUM EFFICIENCY



### Exceptional power & efficiency

- Up to 485 W output and 24.3% efficiency, powered by advanced N type i-TOPCon Ultra cell technology



### Maximised system value for C&I systems

- Low-voltage, high-current architecture for maximum string lengths, simplifying system design and reducing BOS costs



### Long-term value with flexible deployment


- Low annual degradation backed by up to 30 year power warranty and 25 year product warranty
- Mechanical performance up to 5400 Pa positive load and 4000 Pa negative load



### Improved appearance & seamless frontside design

- No cell gaps for improved aesthetics, for diverse installations and flexible system deployment for both C&I and residential applications

### Performance Warranty

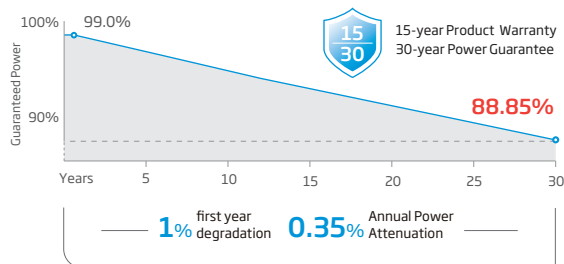

\* Please refer to product warranty for details

### Comprehensive Products and System Certificates

- ISO 9001: Quality Management System
- ISO 14001: Environmental Management System
- ISO14064: Greenhouse Gases Emissions Verification
- ISO45001: Occupational Health and Safety Management System



\*For ground-mounted installation, please consult Trinasolar sales team.

