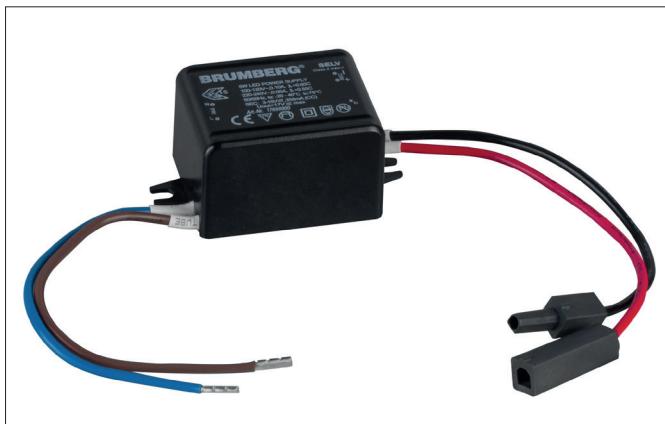


**LED converter 350 mA, switchable**

Article no. 17665000

Light.  
For Generations.**Tender**

LED converter 350 mA, switchable, Rectangular. Ceiling cut-out Installation depth mm, Length 52 mm, Width 30 mm, Weight 0,045 kg, . with max: 3,2 W , Delivery without bulb.Housing material: Plastic, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP20. For connection to an external driver, which is not included in the scope of delivery of the luminaire. on/off switchable.

Article data	
Article no.	17665000
GTIN	4255752500476
Short description	LED converter 350 mA, switchable
Material	Plastic
Shape	Rectangular
Length	52 mm
Width	30 mm
Hight	23 mm
Scope of delivery	Plug&Play version with 110 mm P&P output cable
Weight	0.045 kg
stamp	MM
Conformance	CE

**LED converter 350 mA, switchable**

Article no. 17665000

Light.  
For Generations.

<b>Operating technology of driver</b>	
AC nominal voltage min	90 V
AC nominal voltage max	264 V
Frequency min	50 Hz
Frequency max	60 Hz
Protection class	II
Degree of protection	IP20
Power min	1 W
Power max.	3.2 W
Output_ripple_current	55
Starting current	30A (60 µs)
Suitable for emergency lighting	No
measure point (tc)	85 °C
Version	Plug&Play
Power factor	0.6
max. no. lights on B10 A	50
max. no. lights on B16 A	80
Output voltage max	9.00 V
Output voltage min	2.00 V
Control	on/off
Number of poles	2
Enviroment temprature (ta)	-20 °C bis +50 °C
Measure point (tc)	max. +85 °C
Average nominal lifespan	35000 h
Output current	350 mA

<b>Mounting technology</b>	
Further references	No cover with thermal insulation material Control gear suitable for installation in false ceiling
Application	Indoor
Suitable for through-wiring	No

<b>Packing data</b>	
Gross weight	0.061 kg
Length of packaging	45 mm
Packaging width	40 mm
Packaging hight	80 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>